



I. Driver Features

1. Command Format

This device is controlled through RS-232.

2. RS-232 Commands


Power On	Source: VIDEO	Zoom Up
Power Off	Source: S-VIDEO	Zoom Down
Volume Up	Source: PC 1	Keystone Up
Volume Down	Source: PC 2	Keystone Down
Mute	Source: YPbPr	
Auto	Freeze	

3. Other Driver Features

Default Power Status Feedback: RS-232 Polling
Projector Restart Lockout Timer (Default): 100 Seconds

II. RS-232 Control Wiring

Wire RS-232 control to a male mini-DIN as follows:

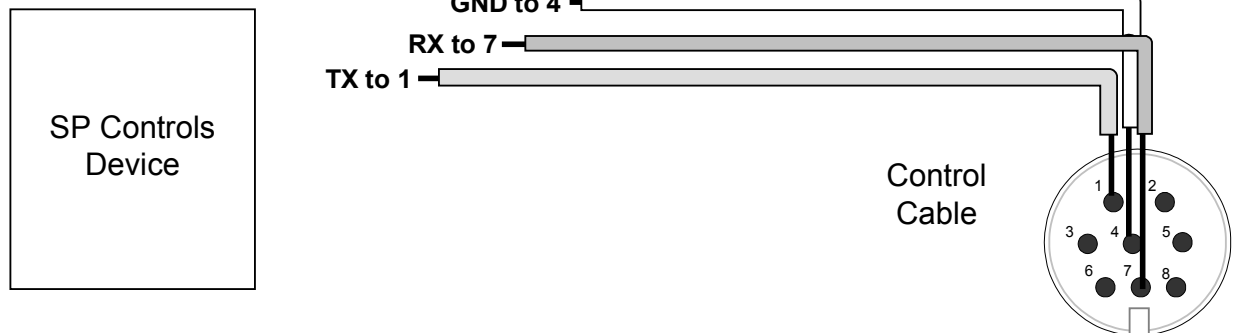

Connect male mini-DIN to projector port labeled *CONTROL*.