



## I. Driver Features

### 1. Command Format

This device is controlled through RS-232.

### 2. RS-232 Commands


Power On	Source: Video 1	Menu
Power Off	Source: Video 2	Adj Up
Volume (absolute)	Source: Video 3	Adj Down
Auto Image	Source: Computer 1	Select
Mute On	Source: Computer 2	
Mute Off		

### 3. Other Driver Features

*Default Power Status Feedback:* RS-232 Power Polling  
*Projector Restart Lockout Timer (Default):* 67 seconds

## II. RS-232 Control Wiring

Wire RS-232 control to a male DB9 as follows:

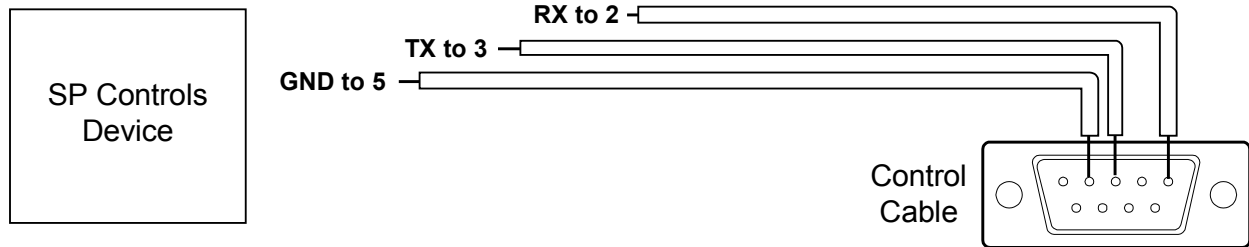

Connect male DB9 to projector port labeled *Serial*.  
*Serial Adapters* (for NRC only): A and B