



## I. Driver Features

### 1. Command Format

This device is controlled through RS-232.

### 2. RS-232 Commands

Power On	Source: Video 1	Menu On
Power Off	Source: Video 2	Menu Off
Volume Up	Source: Computer 1	Adj Up
Volume Down	Source: Computer 2	Adj Down
	Zoom	Adj Left
	Normal	Adj Right
	Focus	Enter


### 3. Other Driver Features

*Default Power Status Feedback:* Power Current Sensor or None

*Projector Restart Lockout Timer (Default):* 65 Seconds

## II. RS-232 Control Wiring

Wire RS-232 control to a female DB9 as follows:

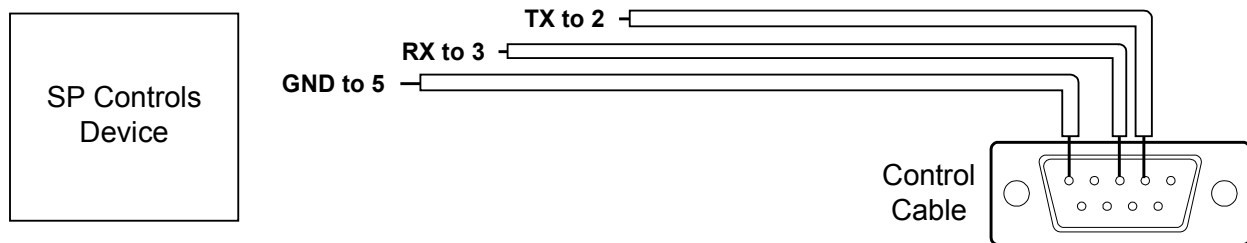

Connect female DB9 to the projector port labeled *Serial Port*.

*Serial Adapters* (for NRC only): None