



I. Driver Features

1. Command Format

This device is controlled through RS-232.

2. RS-232 Commands

Power On	Source: Video (RCA)	Menu	Bright Up	Sync Up
Power Off	Source: S-Video	Adj Up	Bright Down	Sync Down
Volume (absolute)	Source: Computer 1 (ANA-RGB)	Adj Down	Help	Tracking Up
	Source: Computer 1 (DIG-RGB)	Adj Left	Resize	Tracking Down
	Source: Computer 2 (RGB-ANA)	Adj Right	A/V Mute	
	Source: Computer 2 (RGB-VID)	Enter	E-Zoom Up	
		Escape	E-Zoom Down	


3. Other Driver Features

Default Power Status Feedback: RS-232 Polling

Projector Restart Lockout Timer (Default): 95 Seconds

II. RS-232 Control Wiring

Wire RS-232 control to a male DB9 as follows:

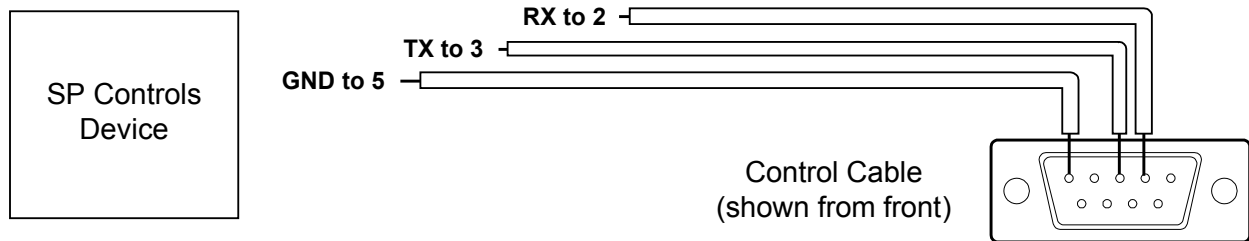

Connect male DB9 to projector port labeled *CONTROL (RS-232C)*.

Serial Adapters (for NRC only): A and B