



## I. Driver Features

### 1. Command Format

This device is controlled through RS-232.

### 2. RS-232 Commands


Power On	Source: Video 1	Menu	Focus/Zoom
Power Off	Source: Video 2	Adj Up	Expand
Volume Up	Source: RGB 1	Adj Down	Release
Volume Down	Source: RGB 2	Adj Left	PinP
Mute On	Source: PC Card 1	Adj Right	Auto Play
Mute Off	Source: PC Card 2	Enter/Still	Auto Position

### 3. Other Driver Features

*Default Power Status Feedback:* RS-232 Polling  
*Projector Restart Lockout Timer (Default):* 67 Seconds

## II. RS-232 Control Wiring

Wire RS-232 control to a female DB9 as follows:

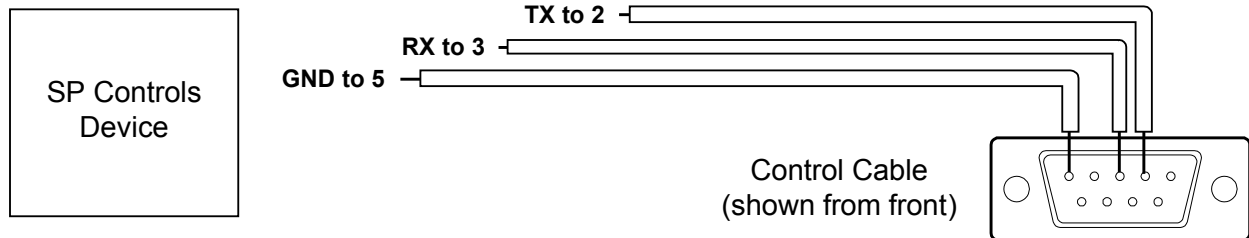

Connect female DB9 to projector port labeled *RS-232C 1*.  
*Serial Adapters* (for NRC only): None