



I. Driver Features

1. Command Format

This device is controlled through RS-232.

2. RS-232 Commands


Power On	Source: Video 1	Menu	Select
Power Off	Source: Video 2	Adj Up	Mute On
Volume (absolute)	Source: Video 3	Adj Down	Mute Off
	Source: Computer 1	Adj Left	Auto Image
	Source: Computer 2	Adj Right	

3. Other Driver Features

Default Power Status Feedback: RS-232 Polling
Projector Restart Lockout Timer (Default): 67 Seconds

II. RS-232 Control Wiring

Wire RS-232 control to a male DB9 as follows:

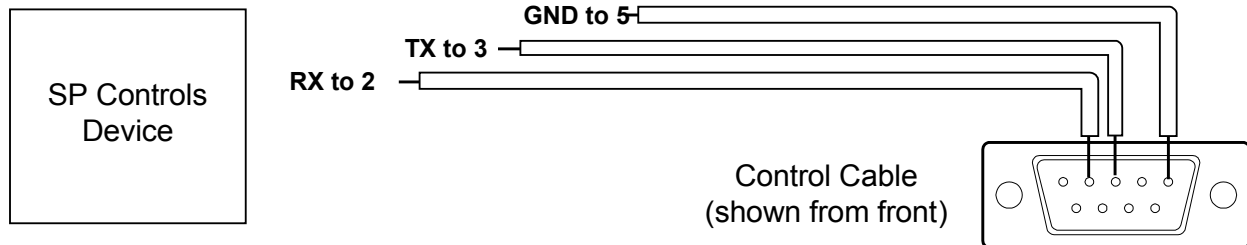

Connect male DB9 to projector port labeled *Serial*.
Serial Adapters (for NRC only): A and B