



I. Driver Features

1. Command Format

This device is controlled through RS-232.

2. RS-232 Commands


Power On	Source: Video	Menu	Freeze
Power Off	Source: S-Video	Adj Up	Enlarge
Volume Up	Source: YCbCr	Adj Down	Resize
Volume Down	Source: VGA 1	Adj Left	Zoom
Mute	Source: VGA 2	Adj Right	Focus
Auto image		Enter	Blank

3. Other Driver Features

Default Power Status Feedback: RS-232 Polling
Projector Restart Lockout Timer (Default): 119 Seconds

II. RS-232 Control Wiring

Wire RS-232 control to a male 8-pin mini-DIN as follows:

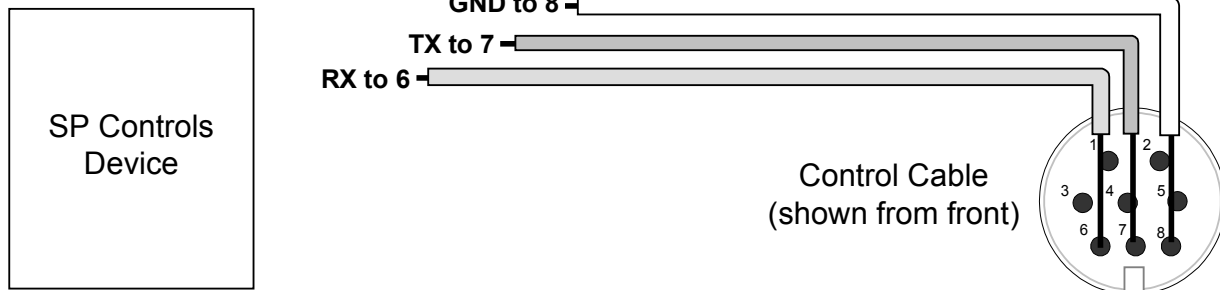

Connect male 8-pin mini-DIN to projector port labeled *PC Control*.
Serial Adapters (for NRC only): None