



I. Driver Features

1. Command Format

This device is controlled through RS-232.

2. RS-232 Commands


Power On	Source: Video 1	Menu	Focus/Zoom	Auto Position
Power Off	Source: Video 2	Adj Up	Focus/Zoom Up	Still
Volume Up	Source: RGB 1	Adj Down	Focus/Zoom Down	
Volume Down	Source: RGB 2	Adj Left	Expand	
		Adj Right	Mute	
		Enter	P in P	

3. Other Driver Features

Default Power Status Feedback: RS-232 Polling
Projector Restart Lockout Timer (Default): 85 Seconds

II. RS-232 Control Wiring

Wire RS-232 control to a female DB9 as follows:

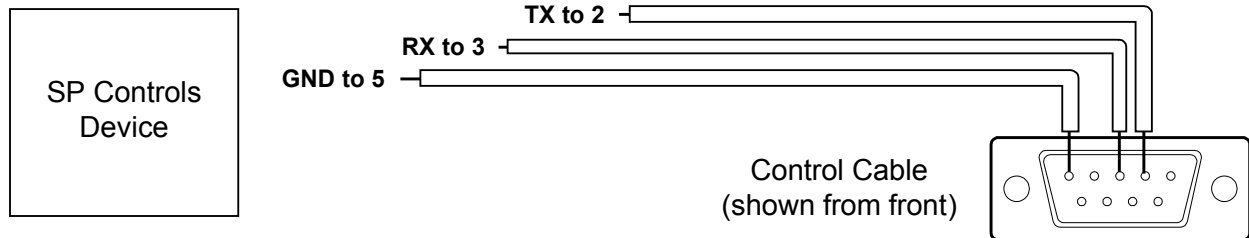

Connect female DB9 to the projector port labeled *RS-232C*.
Serial Adapters (for NRC only): None