



I. Driver Features

1. Command Format

This device is controlled through a combination of RS-232 and IR commands; both are necessary for full control of the device.

2. RS-232 Commands

Power On	Source: Video	Pic Mute On	Menu
Power Off	Source: S-Video	Pic Mute Off	Adj Up
Volume Up	Source: Computer 1	Sound Mute On	Adj Down
Volume Down	Source: Computer 2	Sound Mute Off	Adj Left
Auto Adjust On	Source: Computer 3	OS Mute On	Adj Right
Auto Adjust Off		OS Mute Mute Off	Select
			Cancel

IR Commands


3. Other Driver Features

Default Power Status Feedback: RS-232 Polling
Projector Restart Lockout Timer (Default): 72 Seconds

II. RS-232 Control Wiring

For IR wiring, see product manual for the SP Controls device.

Wire RS-232 control to a male mini-DIN as follows:

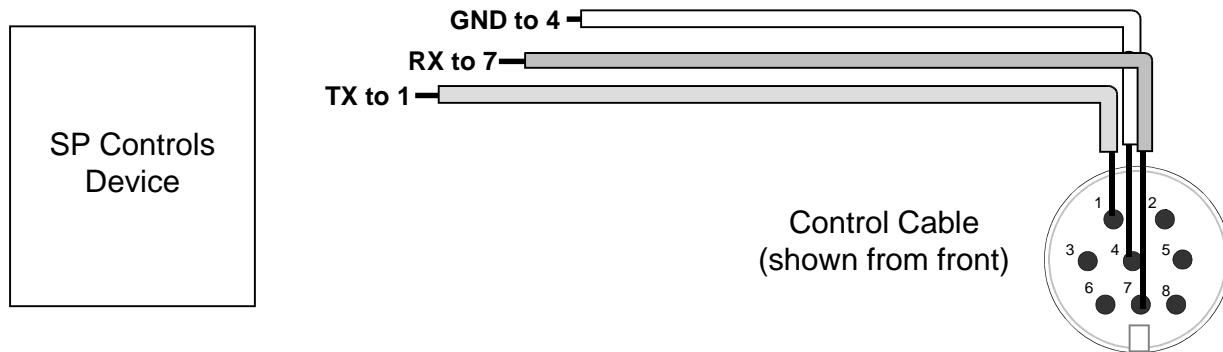

Connect male mini-DIN to projector port labeled *PC CTRL*.
Serial Adapters (for NRC only): N/A

III. Projector Information

The NEC VT695 projector will not power off during the first 120 seconds after it is powered on. Do not attempt to turn it off with the controller during this time as the projector will not respond to the command.