



I. Driver Features

1. Command Format

This device is controlled through RS-232.

2. RS-232 Commands


Power On	Source: Component RCA	Menu	Mute On
Power Off	Source: Composite Video	Adj Up	Mute Off
Volume (level)	Source: S-Video	Adj Down	AV Mute On
	Source: Component VGA	Adj Left	AV Mute Off
	Source: RGB	Adj Right	Zoom Off
	Source: DVI Analog	Enter	Zoom 1
	Source: DVI Digital	Freeze On	Zoom 2
	Source: SCART	Freeze Off	

3. Other Driver Features

Default Power Status Feedback: RS-232 Polling
Projector Restart Lockout Timer (Default): 120 Seconds

II. RS-232 Control Wiring

Wire RS-232 control to a male DB9 as follows:

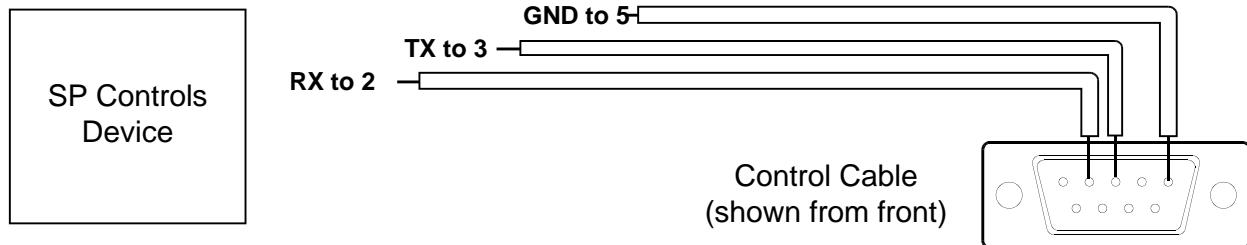

Connect male DB9 to projector port labeled RS-232.

Serial Adapters (for NRC only): A and B