



I. Driver Features

1. Command Format

This device is controlled through RS-232.

2. RS-232 Commands


Power On	Source: Video	Mute On
Power Off	Source: S-Video	Mute Off
Volume (level)	Source: VGA 1	Freeze
	Source: VGA 1 - SCART	Unfreeze
	Source: VGA 1 – Component	Zoom Up
	Source: VGA 2	Zoom Down
	Source: DVI Analog	
	Source: DVI Digital	
	Source: HDMI	

3. Other Driver Features

Default Power Status Feedback: RS-232 Polling
Projector Restart Lockout Timer (Default): 120 Seconds

II. RS-232 Control Wiring

Wire RS-232 control to a female DB9 as follows:

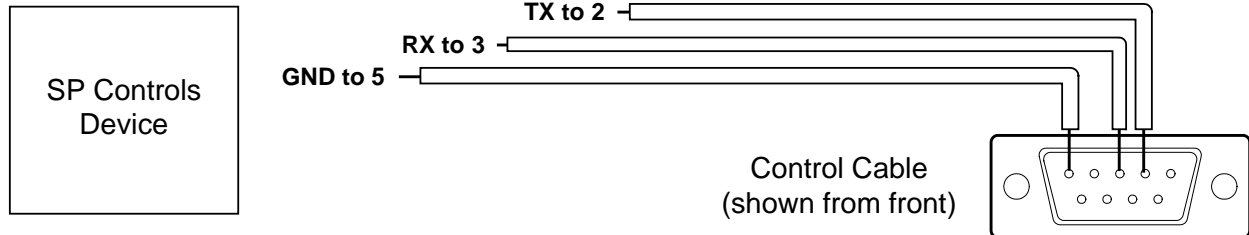

Serial Adapters (for NRC only): None

III. Projector Information

Attention: Optoma's *SOURCE LOCK* feature must be enabled or the control system will not be able to control input selection. In the projector *OPTIONS* menu, select *SOURCE LOCK* and set to ON.