



I. Driver Features

1. Command Format

This device is controlled through a combination of RS-232 and IR commands; both are necessary for full control of the device.

2. RS-232 Commands

Power On	Pic Mute On	Menu	Volume Up	Freeze
Power Off	Pic Mute Off	Adj Up	Volume Down	Magnify Up
Source: Video	Sound Mute On	Adj Down	Keystone Up	Magnify Down
Source: S-Video	Sound Mute Off	Adj Left	Keystone Down	
Source: RGB	On Screen Mute On	Adj Right	Slide Up	
Source: PC Card	On Screen Mute Off	Enter	Slide Down	
Source: DVI Digital		Cancel		
Source: DVI Analog				

IR Commands


3. Other Driver Features

Default Power Status Feedback: None
Projector Restart Lockout Timer (Default): 120 Seconds

II. RS-232 Control Wiring

For IR wiring, see product manual for the SP Controls device.

Wire RS-232 control to a male 8-pin mini_DIN as shown.

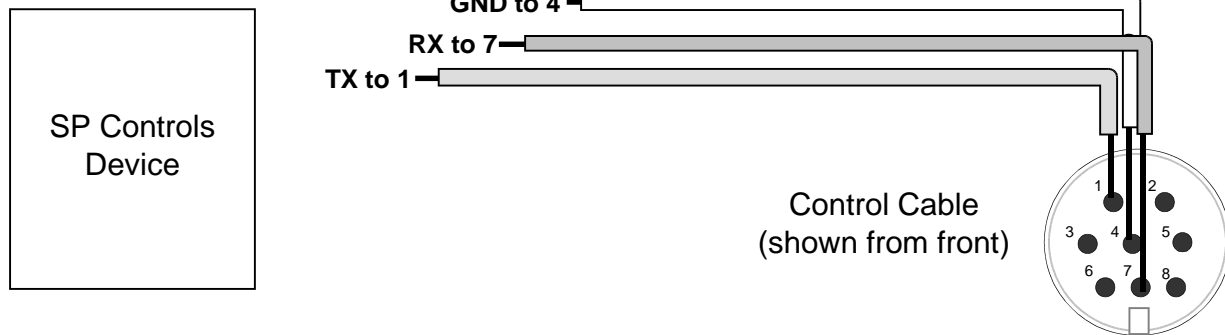

Connect mini-DIN cable to PLUS projector port labeled *CONTROL*.
Serial Adapters (for NRC only): N/A