



I. Driver Features

1. Command Format

This device is controlled through RS-232.

2. RS-232 Commands


Power On	Source: Video	Menu	Freeze On
Power Off	Source: S-Video	Adj Up	Freeze Off
Volume (level)	Source: RGB 1	Adj Down	Digital Zoom Up
Auto Setup	Source: RGB 2	Adj Left	Digital Zoom Down
	Source: BNC	Adj Right	Shutter On
	Source: DVI	Enter	Shutter Off

3. Other Driver Features

Default Power Status Feedback: RS-232 Polling
Projector Restart Lockout Timer (Default): 90 Seconds

II. RS-232 Control Wiring

Wire RS-232 control to a male DB9 as follows:

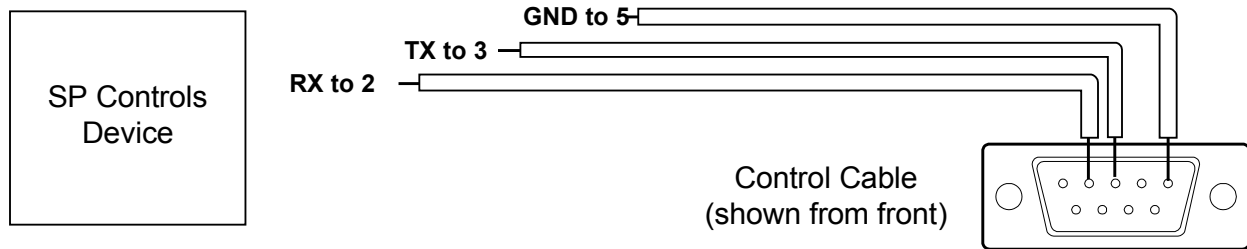

Connect male DB9 to projector port labeled *SERIAL IN*.
Serial Adapters (for NRC only): A and B