



I. Driver Features

1. Command Format

This device is controlled through RS-232.

2. RS-232 Commands


Power On	Source: Video
Power Off	Source: S-Video
Volume (level)	Source: PC1
AV Mute	Source: PC2
	Source: DVI
	Source: Wireless

3. Other Driver Features

Default Power Status Feedback: RS-232 Polling
Projector Restart Lockout Timer (Default): 90 Seconds

II. RS-232 Control Wiring

Wire RS-232 control to a male DB9 as follows:

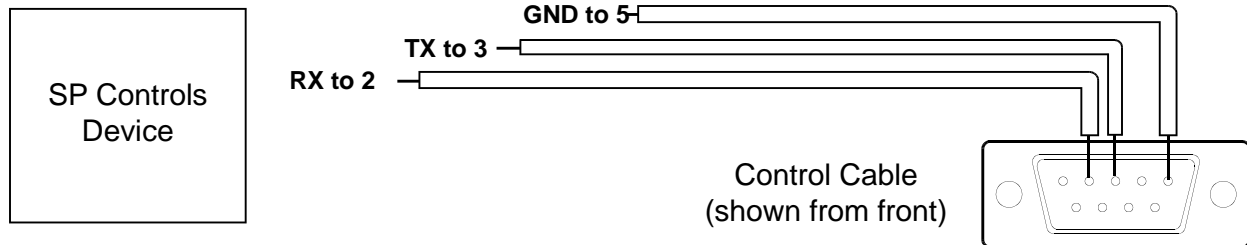

Connect male DB9 to projector port labeled *Serial*.
Serial Adapters (for NRC only): A and B