



I. Driver Features

1. Command Format

This device is controlled through RS-232.

2. RS-232 Commands

Power On	Source: Video	Source: Video +CC1On	Menu	Freeze On
Power Off	Source: S-Video	Source: Video +CC Off	Adj Up	Freeze Off
	Source: PC	CC1 On	Adj Down	Digital Zoom Up
Volume (level)	Source: PC2	CC2 On	Adj Left	Digital Zoom Down
	Source: Wireless	CC3 On	Adj Right	Shutter On
Auto Setup	Source: Component	CC4 On	Enter	Shutter Off
Index Window		CC Off	Return	Side-by-Side


3. Other Driver Features

Default Power Status Feedback: RS-232 Polling

Projector Restart Lockout Timer (Default): 90 seconds

II. RS-232 Control Wiring

Wire RS-232 control to a male DB9 as follows:

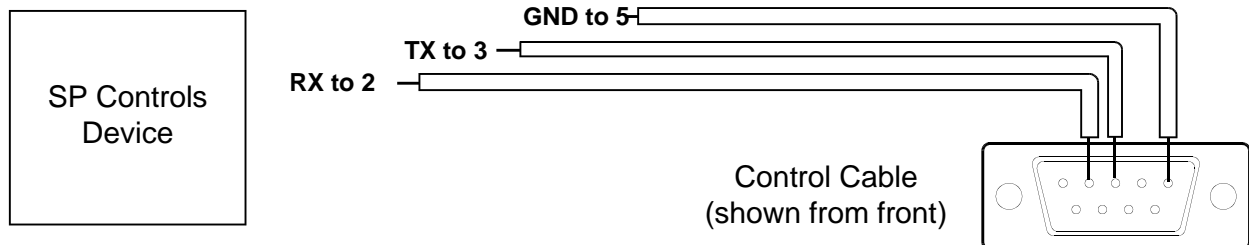

Connect female DB9 to projector port labeled *Serial*.
Serial Adapters (for NRC only): A & B