



I. Driver Features

1. Command Format

This device is controlled through RS-232.

2. RS-232 Commands

Power On	Source: Video	Menu	Freeze On	CC1 On
Power Off	Source: S-Video	Adj Up	Freeze Off	CC2 On
Volume (level)	Source: PC	Adj Down	Digital Zoom Up	CC3 On
AV Mute	Source: PC2	Adj Left	Digital Zoom Down	CC4 On
Auto Setup	Source: Wireless	Adj Right	Shutter On	CC Off
Index Window	Source: DVI	Enter	Shutter Off	
		Return	Side-by-Side	


3. Other Driver Features

Default Power Status Feedback: RS-232 Polling

Projector Restart Lockout Timer (Default): 90 seconds

II. RS-232 Control Wiring

Wire RS-232 control to a male DB9 as follows:

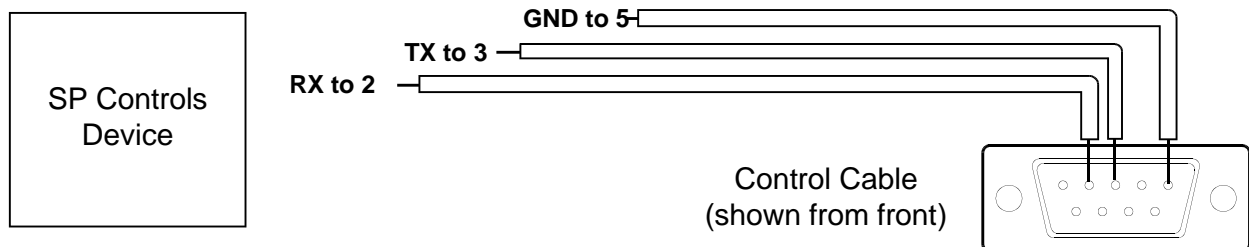

Connect female DB9 to projector port labeled *Serial*.
Serial Adapters (for NRC only): A & B