



## I. Driver Features

### 1. Command Format

This device is controlled through RS-232.

### 2. RS-232 Commands

Power On	Source: Video	Mute On
Power Off	Source: S-Video	Mute Off
Volume (level)	Source: Component	Blank On
	Source: RGB	Blank Off


### 3. Other Driver Features

*Default Power Status Feedback:* RS-232 Polling

*Projector Restart Lockout Timer (Default):* 2 Seconds

## II. RS-232 Control Wiring

Wire RS-232 control to a male DB9 as follows:

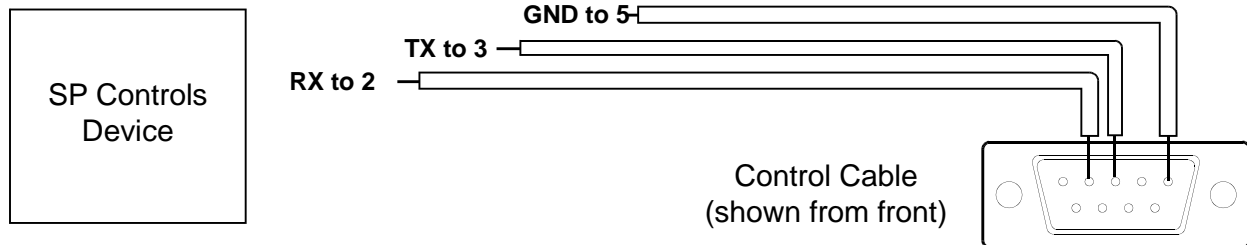

Connect male DB9 to projector port labeled *SERIAL*.

*Serial Adapters* (for NRC only): A & B