



I. Driver Features

1. Command Format

This device is controlled through RS-232.

2. RS-232 Commands


Power On	Source: Video 1	Menu	Fine Sync Up
Power Off	Source: Video 2	Adj Up	Fine Sync Down
Volume Up	Source: Computer 1	Adj Down	Zoom
Volume Down	Source: Computer 2	Adj Left	Focus
		Adj Right	Normal
		Enter	

3. Other Driver Features

Default Power Status Feedback: RS-232 Polling
Projector Restart Lockout Timer (Default): 75 Seconds

II. RS-232 Control Wiring

Wire RS-232 control to a male DB9 as follows:

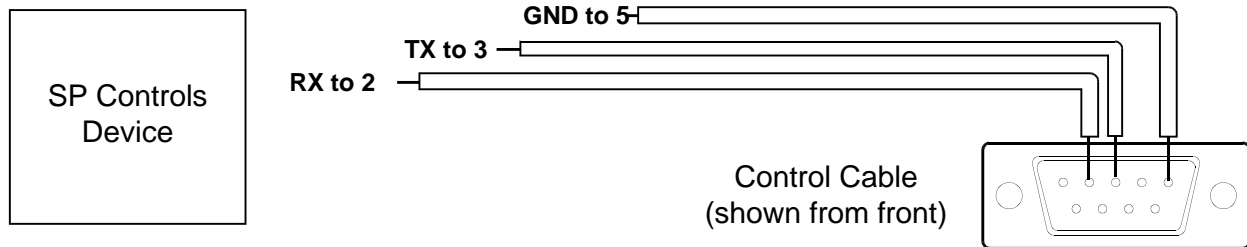

Connect male DB9 to projector port labeled *CONTROL PORT 2*.
Serial Adapters (for NRC only): A and B