



I. Driver Features

1. Command Format

This device is controlled through RS-232.

2. RS-232 Commands


Power On	Source: Slot 1	Source: Slot 1A	Mute On
Power Off	Source: Slot 2	Source: Slot 1B	Mute Off
Volume (level)	Source: Slot 3	Source: Slot 2A	Blank On
	Source: PC	Source: Slot 2B	Blank Off

3. Other Driver Features

Default Power Status Feedback: RS-232 Polling
Projector Restart Lockout Timer (Default): 2 Seconds

II. RS-232 Control Wiring

Wire RS-232 control to a male DB9 as follows:

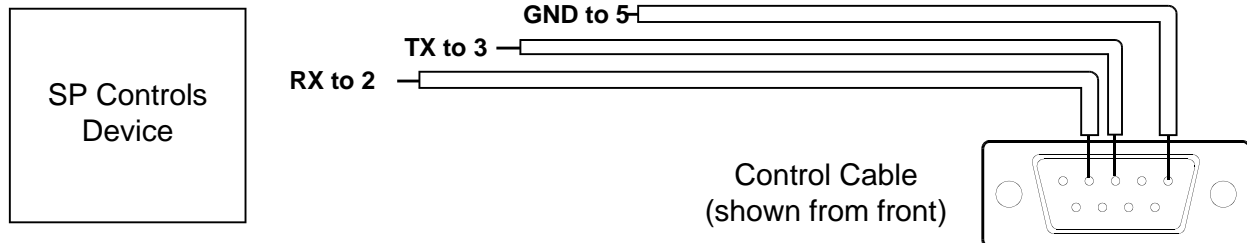

Connect male DB9 to projector port labeled *SERIAL*.
Serial Adapters (for NRC only): A & B